


Konventionelle Feder hinten

Breite (mm): 90

Abb.	Länge Lx (mm)	Länge Ly (mm)	Paketstärke (mm)	ø Buchse vorn (mm)	ø Buchse hinten (mm)	Anzahl Lagen gesamt	Achslast (t)	Bestell-Nr.
1	890	890	135	36	36	9	13	111 902 054 00
2	795	795	250			10	30	111 902 057 00
3	800	800	260			12	26	111 902 056 00

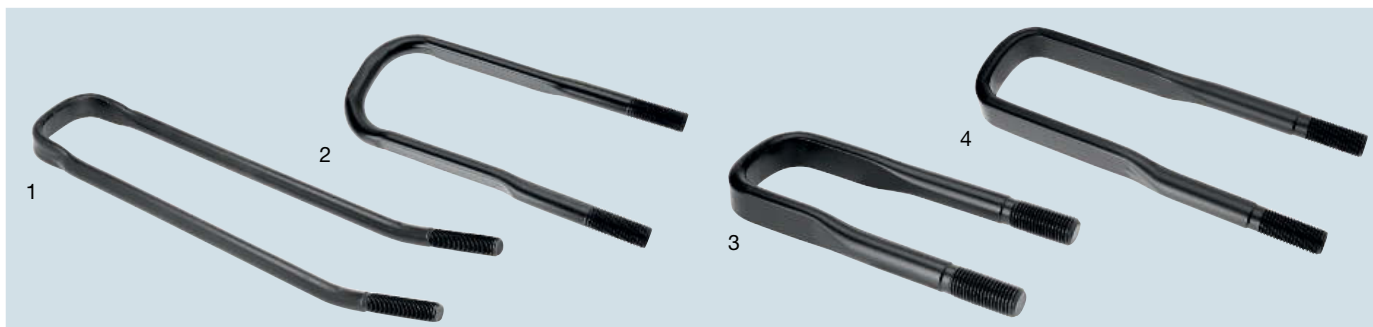

Federbügel

Abb.	ø (mm)	lichte Weite oben (mm)	lichte Weite unten (mm)	Breite Mitte-Mitte (mm)	Länge (mm)	Gewinde (metrisch)	Bestell-Nr.
1	22	92	105	127	535	M 22	182 900 017 00
1	22	92	105	127	545	M 22	182 900 016 00
2	24	104	104	128	310	M 24	182 900 018 00
3	30	90	90	120	325	M 30	182 900 015 00
4	30	94	99	129	410	M 30	182 900 021 00



Sechskantmuttern

Abb.	Gewinde (metrisch)	Schlüsselweite (mm)	Bestell-Nr.
1	M 22	32	921 000 008 00
2	M 24	36	926 000 102 90
3	M 30	46	926 000 009 90
1	M 30	46	921 001 030 00